


# Kaba SLX-D hermetic door

The SLX-D universal drive system is ideal for use in operating theaters, where tightly-shut doors are vital for ensuring maximum air hygiene. Other applications include soundproof access protection for music rooms, meeting rooms and offices.

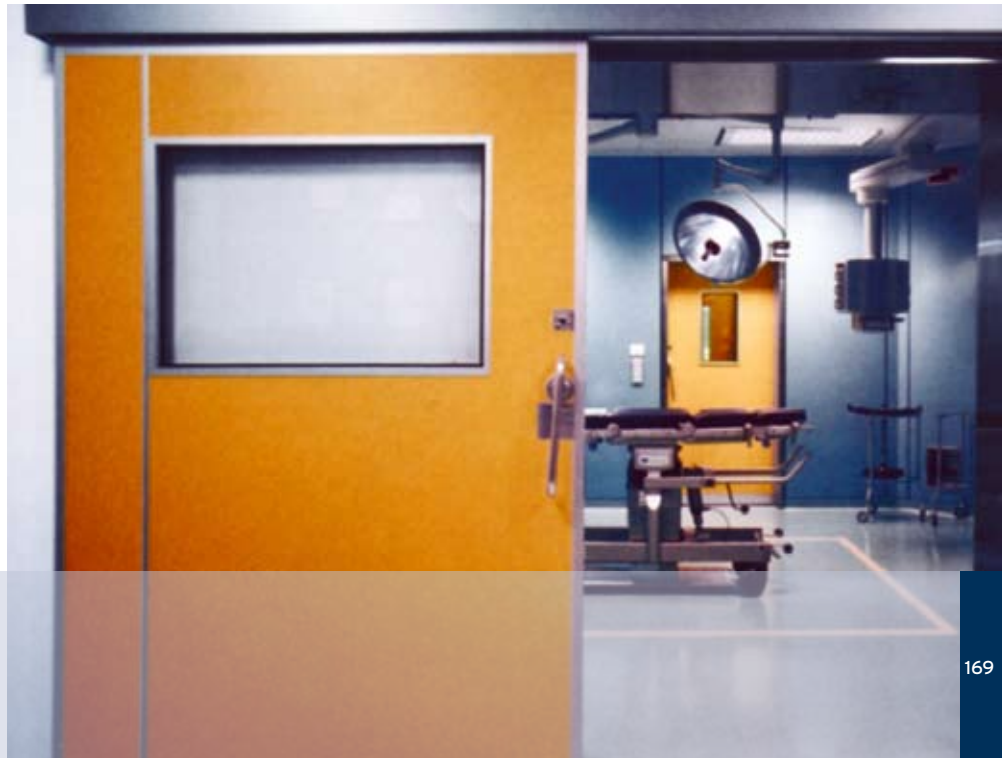

## Hygienic and functional

For all the applications where air-tight doors and contact-less passages are a top priority to guarantee optimal hygiene or sound-proofing, the universal SLX-D drive unit is the ideal choice, such as doors in hospitals, operating rooms, in the pharmaceutical and food industries, conference, office or music room.

## High degree of tightness

During the closing motion, the pivoting mechanism integrated in the drive unit causes the sliding wing to be simultaneously lowered and pressed against the door frame. The wing with its peripheral rubber gasket is fastened onto the connection profile of the running carriage. The lowering motion ensures a high sealing effect of the closing door.

## Functional and compact

The drive system based on the components of the SLX technology has been combined with a pivoting mechanism. Due to the rounded shape of the aluminum drive covering, the cleaning

product can easily drip off. The sealing rubber is designed to withstand all the cleaning products customary in trade.

## Tested for safety

Products are tested by:  
· ift Rosenheim for sound insulation  
· TÜV Nord approved

## Field of applications

Clearance width	700...2900mm
Optimal clearance height	2100mm
Max weight	120kg

## Technical data

Main power supply :	230V, 50Hz
Protection rating :	IP20
Ambient temperature :	-15 - 50°C

## Convenient & comfortable:

- For hermetically sealed sliding doors
- Universally applicable door drive unit
- Pivoting mechanism for tightly sealing heavy or light door wings

